

GJXH FTTH Drop Fiber Optic Cables Steel Wire Strength Member 2.0*3.0 LSZH

Introduction:

The typical GJXH bow-type drop optical cable includes central optical fibre(s) with 2 parallel steel wires as the strength members placed on both sides a LSZH sheath is extruded outside.



Features:

Simple structure, light weight, high tensile strength and metal-free
Novel groove design, easily strip and splice, simplified installation and maintenance
Low smoke, zero halogen and flame retardant sheath, environment-friendly, good safety

Product Series:

GJXFH	FRP Strength Member+2.0*3.0LSZH
GJXH	Steel Wire Strength Member+2.0*3.0 LSZH
GJXH-Small Diameter	Steel Wire Strength Member+1.6*2.0 LSZH
GJX(F)DH	Ribbon Fibers+2.0*4.0LSZH
GJYX(F)CH	Self-Supporting Wires+2.0*5.2LSZH
GJYX(F)CH-Small	Self-Supporting Wires+1.7*3.8LSZH
GJYXFDCH(GJYXDCH)	Self-Supporting Wires+Ribbon Fibers+1.7*3.8LSZH
GYFJU	Aramid Yarn Strength Round Sheath LSZH
GYGXY	Central Tube Glass Yarns armor Round Sheath HDPE
FDC	Flat Drop Cable+Central Tube+3.0*6.0 LSZH
ASU	Self-Supporting FRP Strength+Tube+7.0/8.0 HDPE
GYXY-8S	Figure-8 Self-supporting+Aramid Yarns+Tubes+4.6*8.8HDPE
GYFXBY	Flat Drop Cable+Central Tube+4.6*8.1 LSZH

Cross Section:

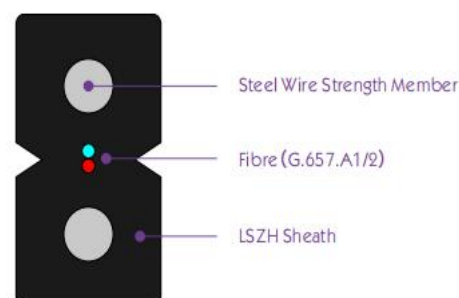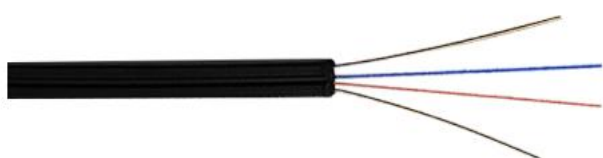

Technical Characteristics:

Type	Diameter mm	Weight (kg/km)	Tensile strength Long/short term (N)	Crush Long/short term (N/100mm)	Bending Radius Static/Dynamic
GJXH-1	2.0*3.0	10.5	100/200	500/1000	15/30
GJXH-2	2.0*3.0	10.5	100/200	500/1000	15/30
GJXH-4	2.0*3.0	10.5	100/200	500/1000	15/30

Note: This specification provides a normative reference. Adjustable outer diameter to suit your budget. Contact us ASAP.

Environmental Characteristics:

Transport/storage temperature: -20℃~70℃

Delivery Length:

Standard length:1000m;Other length available