

PK75-3-322 PK75-3-312 TCCA PVC

75 Ohm CCTV coaxial Cable

NO.7100361



Construction Parameters:

Inner Conductor	0.024"/0.60mm/22 AWG BC
Dielectric	0.144"/2.70mm FPE
Shield 1	AL/Pet Foil
Shield 2	0.12mmTCCA(51%)Braiding
Jacket	0.170"±0.006"/4.50±0.30mmPVC
Jacket Thickness	0.032"/0.81mm
Application	For Use in Longer CCTV Run Lengths

Electrical Characteristics:

Inner Conductor Resistance	The Max. at 20°C shall be < 63Ω/km
Capacitance	56.5±1 pF/m
Impedance	75±5 Ω
Return loss	between 5 and 1000MHz: > 20dB
Velocity of Propagation	0.82
Sparker Test (VAC)	




Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	0.130"±0.006"/3.30±0.30mm PVC

Cross Section

PK75-3-322 PK75-3-312 TCCA PVC

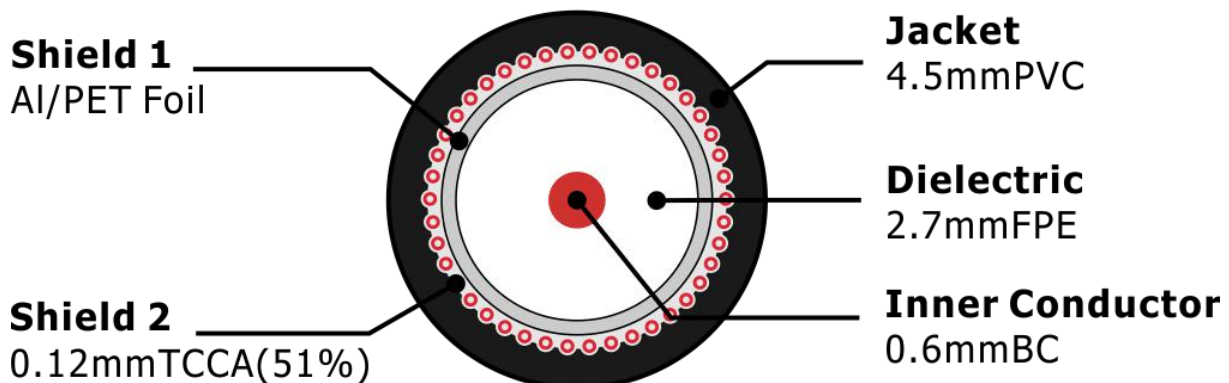

Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100m)
10	3.51
50	7.50
200	15.50
470	24.20
862	33.30
1000	36.30
1350	42.70
1750	49.60
2150	54.90
2400	58.60

Order Informations:

Marking	HELLOSIGNAL PK75-3-322 PK75-3-312 TCCA PVC CCTV COAXIAL CABLE 7100361 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD