

KKCB-B-2 Θ +2x0.75, Figure 8

75 Ohm CCTV coaxial Cable

NO.7102209



Construction Parameters:

Inner Conductor	0.37mmCu
Dielectric	2.3mm Solid Polyethylene
Shield	32x0.12mmCCA(45%)
Jacket	3.8mm PVC
Power Wire Conductor	2x(16x0.25mmCCA)
Power wire Diameter of insulator	2.0mm PVC (Red,Black)
Jacket	5.0mm PVC Common
Application	For Use in Longer CCTV Run Lengths



Electrical Characteristics:


Inner Conductor Resistance	The Max. at 20°C shall be < 166.48 Ω /km
Capacitance	68 \pm 1 pF/m
Impedance	75 \pm 5 Ω
Return loss	20dB
Velocity of Propagation	0.66
Sparker Test (VAC)	3

Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	3.8x5.0mm

Cross Section

KKCB-B-2 Θ +2x0.75, Figure 8

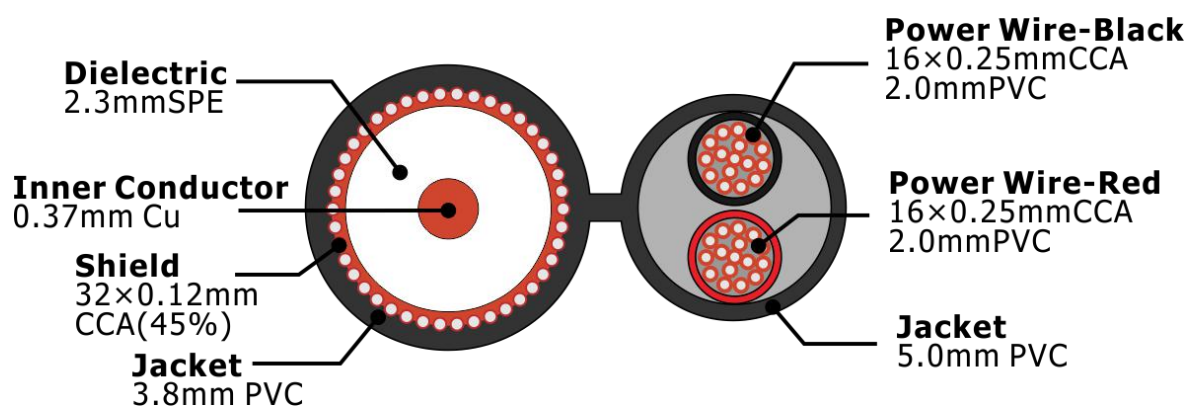

Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)	Max Attenuation (dB/100m)
5		3.69
50		11.62
100		16.50
300		28.42
450		34.81
865		48.25
1000		51.88
1750		68.62
2150		76.06
2500		82.01
3000		89.84

Order Informations:

Marking	HELLOSIGNAL KKCB-B-2 Θ +2x0.75, Figure 8 CCTV COAXIAL CABLE 7102209 $\times\times\times$ M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD