

18AWG 6/C SOL Shielded FPLP-CL2P

Fire Alarm Cables
NO.7110144



Cable construction :

Conductor:

18 AWG Solid Bare Copper
Nom.Dia:0.04"(1.02mm)

Dielectric:

Type: Plenum PVC
Dia.over Dielectric: 0.054±0.004"nom.(1.37mm±0.10mm)
Drain Wire: 0.51mm Solid Tinned-Copper
Shield :0.001"(0.025mm) thick Aluminum/Mylar

Color Code:

1.Blk 2.Red 3.Ylw 4.Grn
5.Brn 6.Blu

Jacket:

Type: Plenum PVC
Color: Red
Dia.over Jacket: 0.168"±0.006"(4.27±0.15mm)

Print Legend:

HELLOSIGNAL NO.7110144 18AWG 6C 75C E***** (UL) Shielded FPLP-CL2P
SUN RES(ROHS) ****M/FT DEVICE/ZONE
A B C D E F 1 2 3 4 5 6 7 8 9




Electrical Properties :

Temperature Rating	-20°C ~ +75°C
Operating Voltage	300 Volts max
Capacitance	62 pf/ft nom
Impedance	30 Ohms nom
DC Resistance	6.5 Ohms/M' at 20°C

Cross Section :

18AWG 6/C SOL Shielded FPLP-CL2P

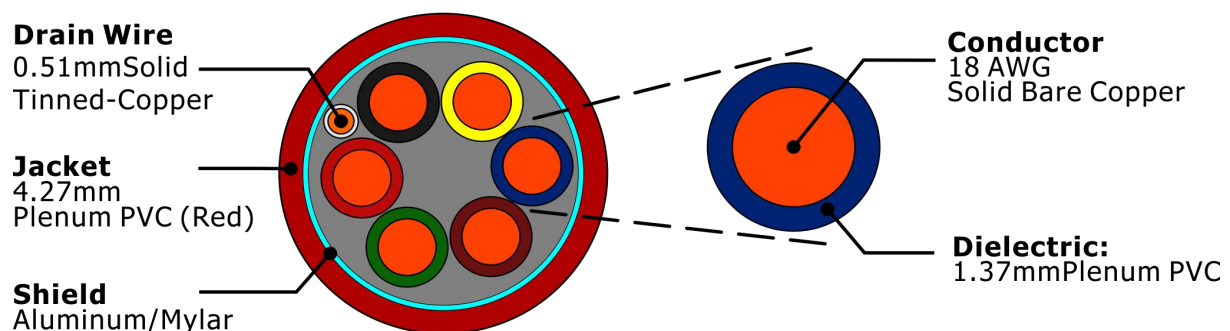

Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD