

PK75-2-110 BC 40% CCA PVC

75 Ohm CCTV coaxial Cable

NO.7100303



Construction Parameters:

Inner Conductor	0.014"/0.37mm/28 AWG BC
Dielectric	0.144"/2.2mm Solid PE
Shield	Copper clad aluminum braid wire 40% coverage
Jacket	0.130"±0.006"/3.30±0.30mm PVC
Jacket Thickness	0.032"/0.81mm
Application	For Use in Longer CCTV Run Lengths

Electrical Characteristics:

Inner Conductor Resistance	The Max. at 20°C shall be < 168.2 Ω/km
Capacitance	68±1 pF/m
Impedance	75±5 Ω
Return loss	20dB
Velocity of Propagation	
Sparker Test (VAC)	




Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	0.130"±0.006"/3.30±0.30mm PVC

Cross Section

PK75-2-110 BC 40% CCA PVC

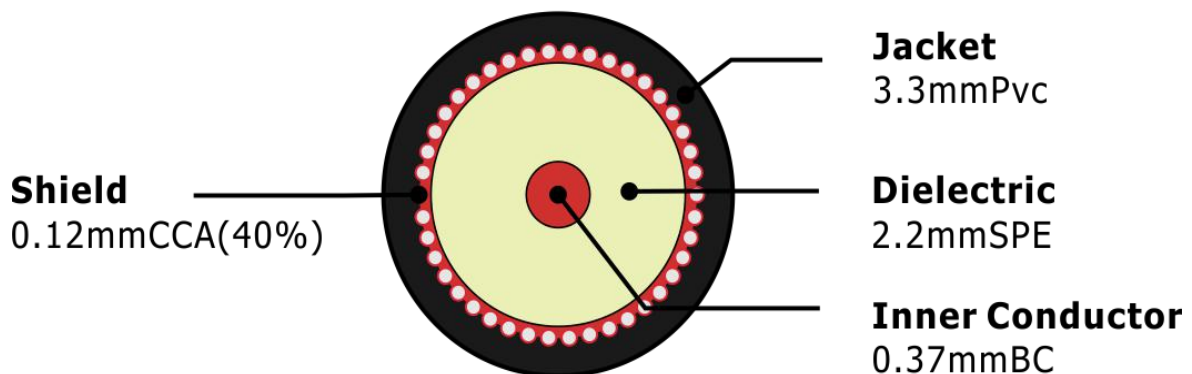

Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100m)
10	5.86
50	13.50
200	30.80
470	47.50
862	73.00
1000	
1350	
1750	

Order Informations:

Marking	HELLOSIGNAL PK75-2-110 BC 40% CCA PVC CCTV COAXIAL CABLE 7100303 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD