

18AWG 6/C STR Unshielded FPL-CL2

Fire Alarm Cables

NO.7110208



Cable construction :

Conductor:

18AWG Stranded Bare Copper

18 AWG : 7/26, 16/30, 19/30, 41/34, 65/36

Nom.Dia:0.04"(1.02mm)

Dielectric:

Type: PVC

Dia.over Dielectric: 0.060±0.004"nom.(1.52±0.10mm)

Color Code:

1.Blk	2.Red	3.Ylw	4.Grn
5.Brn	6.Blu		

Jacket:

Type: PVC

Color: Red

Dia.over Jacket: 0.208"±0.006"(5.28±0.15mm)

Print Legend:

HELLOSIGNAL NO.7110208 18AWG 6C 60C Exxxxxx(UL) STR Unshielded FPL-CL2

SUN RES(ROHS) xxxM/FT DEVICE/ZONE

A B C D E F 1 2 3 4 5 6 7 8 9




Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	20 pf/ft nom
Impedance	81 Ohms nom
DC Resistance	6.32 Ohms/M' at 20°C

Cross Section :

18AWG 6/C STR Unshielded FPL-CL2

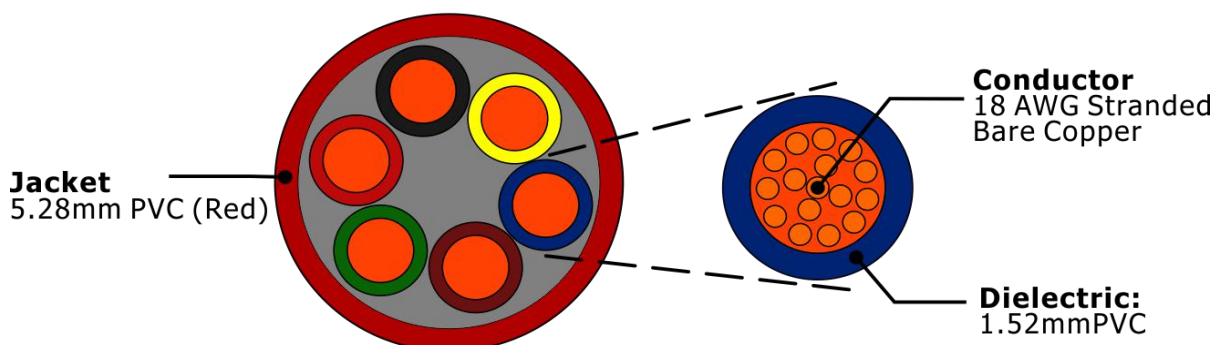

Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNITION CO.,LTD